User's Manual for CoPeck

What is "CoPeck"?

"CoPeck" is an application software for getting a report of the printer.

Supported Environment

Microsoft® Windows 8
Microsoft® Windows 7
Microsoft® Windows Vista
Microsoft® Windows XP

How to Install

Execute Setup.exe and follow the wizard instruction.

Supported Models

<Type1>
- PROII/ProII(V) Series
- SP-540V/300V/300
- FLJ-300
- SJ-1000/1045

<Type2>
- AJ-1000/740/1000i/740i
- FP-740

<Type3>
- XC-540/540MT, XJ-740/640/540
- VP-540/300/540i/300i
- LEC-540/300/330/300A, LEJ-640
- RS-640/540
- FH-740
- XR-640

<Type4>
- SP-540i/300i
- VS-640/540/420/300
- LEF-12
- RA-640, RE-640

<Type5>
- XF-640

How to Uninstall

Uninstall CoPeck from control panel of windows.

How to Use

[1] Preparation for printer
Turn on Main Power Switch and Turn off Sub Power Switch.
Please be confirmed that there is no printing data transmission between the printer and PC.

[2] Preparation for PC
In case of using parallel connection on Windows XP stop the spool service during using this application. After using this application, restart the spool service.

[3] Starting CoPeck
Double-click CoPeck.exe and you can see the dialog as shown below.

CoPeck.exe

Double clicking

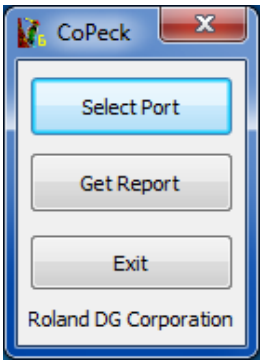

[4] Selecting models and connection port

Open the [Select Port] dialog by clicking the "Select Port" button.
Select the type of the target printer in Product selection. For the details, refer to [Supported Models] in the previous page.

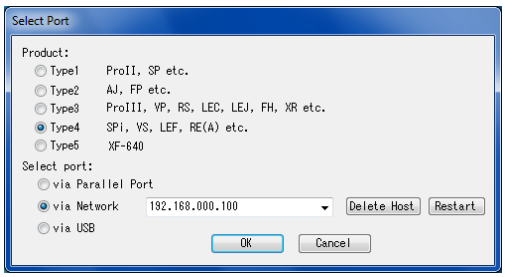

Select connection port.
If you select [via Network], type in IP address.

[5] Getting a report from your printer

Click the [Get Report] button.

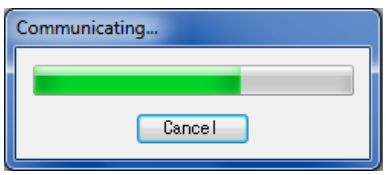

Save it as a file.

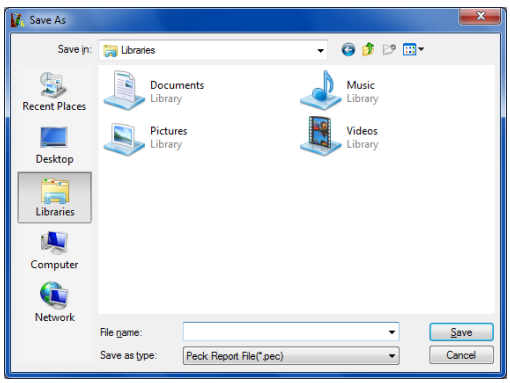

[6] Finishing CoPeck

Finish CoPeck by clicking the [Exit] button.

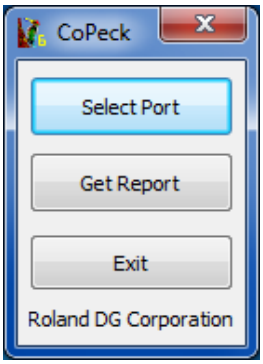

If CoPeck cannot get a report...

Please check the points below.

1. Is the Sub Power Switch of the printer off?
2. Did you select correct model and port?
3. Is IP address correct?
4. In case of PROII series, is firmware version 2.0 or above?

Copyright © 2007-2013 Roland DG Corporation

http://www.rolanddg.com